


GKV SERIES VERTICAL BARREL PUMPS

We can substitute all spares of screw pumps for all manufacturer based on the drawing/ samples.

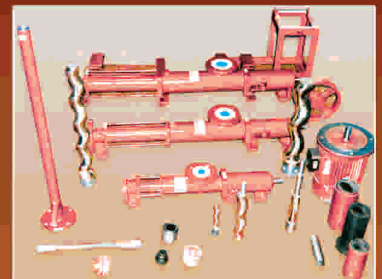

➤ Specifications

Capacity	upto 2m ³ / hr
Pressure	4 kg/cm ²
Viscosity	upto 50,000 CPS
Temp	upto 100°C

➤ Applications

- All Chemical Industries for emptying the barrels.
- All Cosmetic Industries.
- All Oil Industries and Refineries.
- All Pharmaceutical Industries.
- All Rubber processing and manufacturing Industries.
- All Ceramic Industries.
- All Fruit pulp extracting Industries.
- All Food Processing Industries.

➤ Principle Benefits

- Self priming up to 8 meters of water.
- Positive displacement, Flow is proportional to speed and independent of pressure.
- Handles most liquids from water to abrasive slurries, entertained gases and froth to viscous and non Newtonian fluids.
- Low emulsification, low shear, negligible pulsation.
- Stainless steel materials of construction.
- Pumps slurries / liquids with suspended solids and particles.

GEKKAY HELICAL PUMPS

SF NO 6/1 , Athipalayam Road, Chinnavedampati, Coimbatore 641 006

Phone : +91-422-2665254, 2665214, 6597282, Fax : +91-422-2665251

website : www.helixpump.com

Email : sales@helixpump.com, kannan@helixpump.com, service@helixpump.com